


RD4000R SS Series

6~10kVA single phase Rack UPS

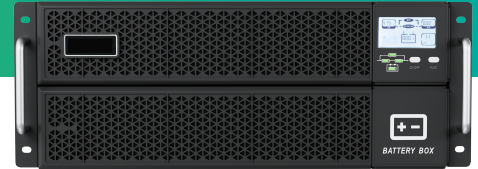

Power range

6~10kVA



Operation

1P/1P, online double conversion



Applications

Government, Finance, IT, Education, Transportation, Broadcasting, Medical, Energy, etc.



Characteristics

- Intelligent battery management.
- 3-level topology, high performance and efficiency.
- Online double conversion, full digital control.
- Output PF=1, high load adaptability.
- Wide range of input voltage tolerance.
- Adapt to half-wave load.
- Auto fault waveform recording.
- Self-aging function to save test energy 10kW in 2U, high power density.

Model	SS006BR	SS006LR	SS010BR	SS010LR
Rate Power	6kVA/6kW	6kVA/6kW	10kVA/10kW	10kVA/10kW
Cold start	Default output 50/60Hz			
Input voltage range	110~288VAC; 100% load@>176VAC; 90% load@>154VAC; 75% load@>132VAC; 50% load@>110VAC			
Input power factor	≥0.99			
Frequency range	40-70Hz			
Output power factor	1.0			
Output	Rate voltage	220/230/240VAC,200/208VAC(PF=0.9)		
	Load response	≤5% (0% - 100% -0%)		
	Recovery time	≤40ms (0% - 100% -0%)		
	THDu	≤1%, linear load ;≤ 5% , non-linear load according to IEC62040-3		
Transfer time-Main to Battery	0ms			
Transfer time-INV to BYP	0ms			
Crest factor	3:1			
Battery type	12VDC/7Ah	External battery	12VDC/9Ah	External battery
Battery Number	16PCS	16-24 PCS settable	16PCS	16-24 PCS settable
Battery voltage	192VDC (default),settable			
Max charging	1A	5A	1A	5A
Efficiency –normal mode	Max 95%			
Noise (1 meter)	<58dB			
Overload	Normal mode	105%~110%: 10mins,111%~125%: 1 min,126%~150%: 30 seconds		
	ECO mode	<125%: long time,126%~130%:5mins,131%~150%:1min,>150% :200ms		
Communication	RS232, EPO, RS485			
Option	AS400, USB, SNMP card, 12A charger, Parallel kit, Air filter			
Dimension W*D*H(mm)	440*660*172	440*580*86	440*660*172	440*580*86
Weight(kg)	62.5	16	63	18